


380-3800MHz N female 300W 3IN 3OUT Low PIM Hybrid combiner

- Strip-line and air-dielectric design
- Wide band frequency 380-3800MHz
- High isolation and good VSWR
- Low PIM

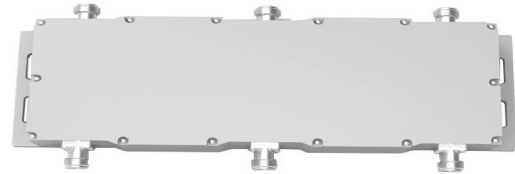

Specifications :

Part No.	HT-HC33-3838-NF
Operating Frequency (MHz)	380-3800
Impedance (Ohm)	50
VSWR	1.3
Coupling (dB)	5.1
Insertion Loss (dB)	±2.5
Isolation (dB)	20
IM3 (dBc @ 2×43dBm)	-160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (C)	-40 ~ + 80
Interface	N - Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	296.4× 108× 45
Net Weight (g)	2230

Outline Drawing :

